


# HEA Beams

## Laser fused - Saldato Laser

H	B	s	t	kg/m
96	100	5	8	16
114	120	5	8	19,28
133	140	5,5	8,5	24,14
152	160	6	9	29,47
171	180	6	9,5	34,66
190	200	6,5	10	40,84
210	220	7	11	49,25
230	240	7,5	12	58,44
250	260	7,5	12,5	65,5
270	280	8	13	73,86
290	300	8,5	14	85,02
310	300	9	15,5	94,49
330	300	9,5	16,5	101,77
350	300	10	17,5	109,2
390	300	11	19	122,18
440	300	11,5	21	137,42
490	300	12	23	153,02
540	300	12,5	24	164,4
590	300	13	25	176,16
640	300	13,5	26	188,3
690	300	14,5	27	203,38
790	300	15	28	222,48
890	300	16	30	250,24
990	300	16,5	31	271,3

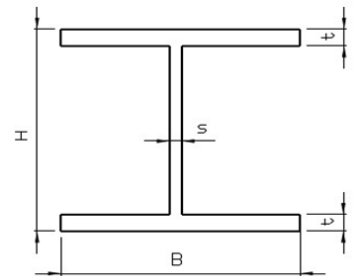

### Dimensional Tolerances

Tolleranze dimensionali

EN 10034

### Available materials

Qualità disponibili

AISI 304/W.1.4301

AISI 304L/W.1.4307

AISI 316/W.1.4401

AISI 316L/W.1.4404

AISI 316Ti/W.1.4571