


HEB Beams

Laser fused - Saldato Laser

H	B	s	t	kg/m
100	100	6	10	19,84
120	120	6,5	11	26,22
140	140	7	12	33,38
160	160	8	13	41,86
180	180	8,5	14	50,66
200	200	9	15	60,24
220	220	9,5	16	70,61
240	240	10	17	81,76
260	260	10	17,5	90,8
280	280	10,5	18	101,14
300	300	11	19	114,26
320	300	11,5	20,5	124,07
340	300	12	21,5	131,71
360	300	12,5	22,5	139,5
400	300	13,5	24	153,22
450	300	14	26	169,38
500	300	14,5	28	185,9
550	300	15	29	198,3
600	300	15,5	30	211
650	300	16	31	224,06
700	300	17	32	240,1
800	300	17,5	33	261,16
900	300	18,5	35	290,84
1000	300	19	36	313,86

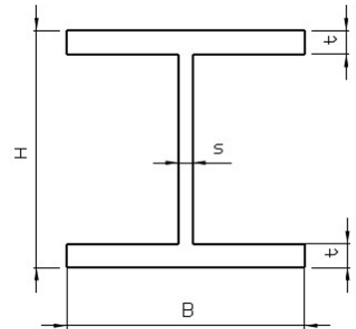

Dimensional Tolerances

Tolleranze dimensionali

EN 10034

Available materials

Qualità disponibili

AISI 304/W.1.4301

AISI 304L/W.1.4307

AISI 316/W.1.4401

AISI 316L/W.1.4404

AISI 316Ti/W.1.4571