


Unequal angles

Hot rolled - Laminato a caldo

A	B	t	kg/m
20	10	3	0,65
25	15	3	0,89
30	15	3	1,01
30	20	3	1,13
30	20	4	1,47
40	20	3	1,37
40	20	4	1,79
40	20	5	2,2
40	30	3	1,61
40	30	4	2,11
40	30	5	2,6
45	30	3	1,77
45	30	4	2,27
45	30	5	2,8
50	25	3	1,73
50	25	4	2,27
50	25	5	2,8
50	30	3	1,85
50	30	4	2,43
50	30	5	3
50	40	3	2,13
50	40	4	2,79
50	40	5	3,4
60	30	5	3,4
60	30	6	4,03
60	30	7	4,65
60	40	5	3,8
60	40	6	4,51
65	50	5	4,4
65	50	7	6,05
65	50	9	7,64
70	50	6	5,47
70	50	7	6,33
70	50	8	7,17

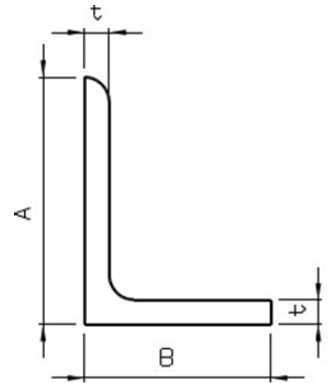

Dimensional Tolerances

Tolleranze dimensionali

EN 10056-2

Available materials

Qualità disponibili

AISI 304/W.1.4301


AISI 304L/W.1.4307

AISI 316/W.1.4401

AISI 316L/W.1.4404

AISI 316Ti/W.1.4571

UNEQUAL ANGLES HOT ROLLED

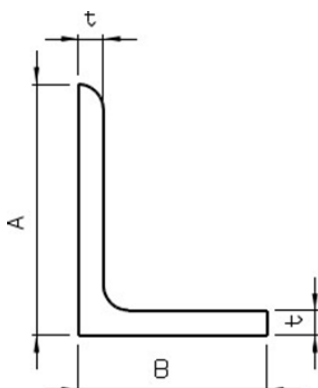

Dimensional Tolerances

Tolleranze dimensionali

EN 10056-2

Available materials

Qualità disponibili

AISI 304/W.1.4301

AISI 304L/W.1.4307

AISI 316/W.1.4401

AISI 316L/W.1.4404

AISI 316Ti/W.1.4571

A	B	t	kg/m
70	50	9	8
75	50	6	5,71
75	50	7	6,61
75	50	8	7,49
75	55	6	5,96
75	55	7	6,89
75	55	8	7,81
75	55	9	8,71
80	40	6	5,47
80	40	8	7,17
80	60	6	6,43
80	60	8	8,45
80	65	6	6,67
80	65	8	8,77
80	65	10	10,8
90	60	6	6,91
90	60	8	9,09
90	70	8	9,73
100	50	6	6,91
100	50	8	9,09
100	50	10	11,20
100	65	6	7,63
100	65	7	8,85
100	65	8	10,05
100	65	9	11,23
100	65	10	12,40
100	75	6	8,11
100	75	7	9,41
100	75	8	10,69
100	75	9	11,95
100	75	10	13,20
120	80	8	12,29
120	80	10	15,20
125	75	10	15,2
130	65	10	14,8
130	75	10	15,6
130	90	10	16,8
140	90	10	17,6
150	75	10	17,20
150	90	10	18,40
150	100	10	19,20

kametspecialprofiles.com