


Equal angles

Laser fused - Saldato Laser

A	B	t	kg/m
20	20	3	0,9
20	20	4	1,16
25	25	3	1,14
25	25	4	1,48
25	25	5	1,82
30	30	3	1,37
30	30	4	1,79
30	30	5	2,22
30	30	6	2,61
35	35	4	2,13
35	35	5	2,62
40	40	3	1,87
40	40	4	2,43
40	40	5	3
40	40	6	3,58
40	40	8	4,61
45	45	3	2,13
45	45	4	2,79
45	45	5	3,45
45	45	6	4,03
50	50	3	2,37
50	50	4	3,07
50	50	5	3,8
50	50	6	4,51
50	50	7	5,21
50	50	8	5,89
50	50	12	8,45
55	55	6	4,99
60	60	5	4,6
60	60	6	5,47
60	60	7	6,33
60	60	8	7,17
60	60	10	8,8
65	65	6	5,95

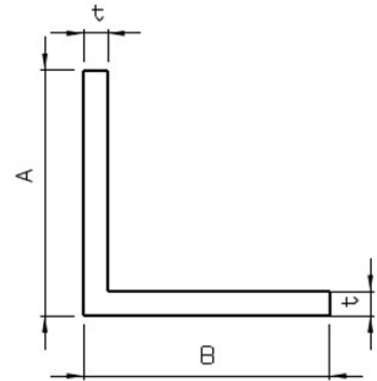

Dimensional Tolerances

Tolleranze dimensionali

EN 10056-2

Available materials

Qualità disponibili


AISI 304/W.1.4301

AISI 304L/W.1.4307

AISI 316/W.1.4401

AISI 316L/W.1.4404

AISI 316Ti/W.1.4571

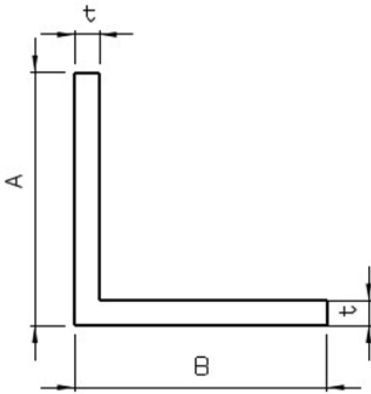

Dimensional Tolerances

Tolleranze dimensionali

EN 10056-2

Available materials

Qualità disponibili

AISI 304/W.1.4301

AISI 304L/W.1.4307

AISI 316/W.1.4401


AISI 316L/W.1.4404

AISI 316Ti/W.1.4571

A	B	t	kg/m
65	65	7	6,89
65	65	8	7,81
65	65	9	8,71
65	65	10	9,6
70	70	5	5,4
70	70	6	6,43
70	70	7	7,45
70	70	8	8,45
70	70	9	9,43
70	70	10	10,4
75	75	5	5,8
75	75	6	6,91
75	75	7	8,01
75	75	8	9,09
75	75	9	10,15
75	75	10	11,2
75	75	12	13,25
80	80	5	6,2
80	80	6	7,39
80	80	7	8,57
80	80	8	9,73
80	80	9	10,87
80	80	10	12
80	80	12	14,21
90	90	6	8,35
90	90	7	9,69
90	90	8	11,01
90	90	9	12,31
90	90	10	13,6
100	100	6	9,31
100	100	7	10,81
100	100	8	12,29
100	100	9	13,75
100	100	10	15,2
100	100	12	18,05
100	100	13	19,45
100	100	15	22,2
110	110	6	10,27
110	110	7	11,93
110	110	8	13,57

EQUAL ANGLES LASER FUSED

A	B	t	kg/m
110	110	9	15,19
110	110	10	16,8
110	110	11	18,39
110	110	12	19,97
120	120	7	13,05
120	120	8	14,85
120	120	9	16,63
120	120	10	18,4
120	120	11	20,15
120	120	12	21,89
120	120	13	23,61
120	120	14	25,31
120	120	15	27
120	120	16	28,67
125	125	10	19,2
130	130	8	16,13
130	130	9	18,07
130	130	10	20
130	130	11	21,91
130	130	12	23,81
130	130	13	25,69
130	130	14	27,55
130	130	15	29,4
130	130	16	31,23
140	140	9	19,51
140	140	10	21,6
140	140	11	23,67
140	140	12	25,73
140	140	13	27,77
140	140	14	29,79
140	140	15	31,8
140	140	16	33,79
150	150	6	14,11
150	150	10	23,2
150	150	12	27,65
150	150	13	29,85
150	150	14	32,03
150	150	15	34,2
150	150	16	36,35
150	150	18	40,61

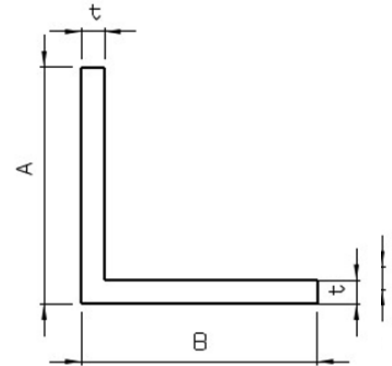

Dimensional Tolerances

Tolleranze dimensionali

EN 10056-2

Available materials

Qualità disponibili


AISI 304/W.1.4301

AISI 304L/W.1.4307

AISI 316/W.1.4401

AISI 316L/W.1.4404

AISI 316Ti/W.1.4571

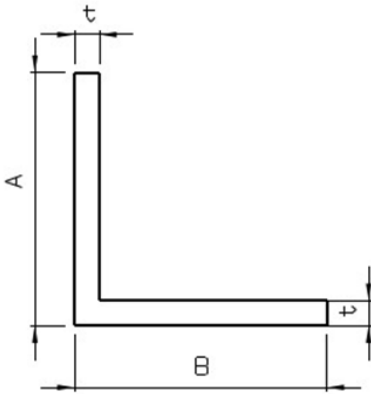

Dimensional Tolerances

Tolleranze dimensionali

EN 10056-2

Available materials

Qualità disponibili

AISI 304/W.1.4301

AISI 304L/W.1.4307

AISI 316/W.1.4401

AISI 316L/W.1.4404

AISI 316Ti/W.1.4571

A	B	t	kg/m
150	150	20	44,8
160	160	15	36,6
160	160	16	38,91
160	160	18	43,49
160	160	20	48
180	180	10	28
180	180	13	36,09
180	180	15	41,4
180	180	16	44,03
180	180	18	49,25
180	180	20	54,4
200	200	10	31,2
200	200	12	37,25
200	200	13	40,25
200	200	15	46,2
200	200	16	49,15
200	200	18	55,01
200	200	20	60,8
250	250	13	50,65
250	250	15	58,2
250	250	18	69,41
250	250	20	76,8
300	300	13	61,05
300	300	15	70,2
300	300	16	74,75
300	300	18	83,81
300	300	20	92,8