


Unequal T-Shape

Laser fused - Saldato Laser

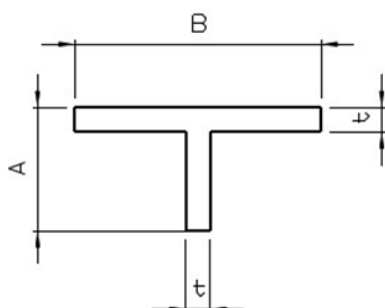

A	B	t	kg/m
20	40	4	1,81
25	50	5	2,81
30	60	5,5	3,73
35	70	6	4,77
40	80	7	5,22
50	100	8,5	9,64
60	120	10	13,61

Dimensional Tolerances

Tolleranze dimensionali

EN 10055

Available materials

Qualità disponibili

AISI 304/W.1.4301

AISI 304L/W.1.4307

AISI 316/W.1.4401

AISI 316L/W.1.4404

AISI 316Ti/W.1.4571