


UAP Channels

Hot rolled - Laminato a caldo

H	B	s	t	kg/m
50	25	3	3	2,3
60	30	5	5	4,5
80	40	5	5	6
80	40	6	6	7,1
100	50	4	4	6,2
100	50	5	5	7,6
100	50	6	6	9
120	60	5	5	9,2
120	60	6	6	11
130	65	6	6	11,9
130	65	9	9	17,4
140	70	7	7	14,9
150	75	6	6	13,8
150	75	9	9	20,3
160	80	6	6	14,8
160	80	8	8	19,5

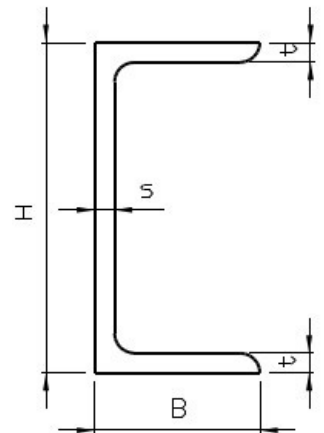

Dimensional Tolerances

Tolleranze dimensionali

EN 10279

Available materials

Qualità disponibili

AISI 304/W.1.4301

AISI 304L/W.1.4307

AISI 316/W.1.4401

AISI 316L/W.1.4404

AISI 316Ti/W.1.4571