


UAP Channels

Laser fused - Saldato Laser

H	B	s	t	kg/m
40	20	4	4	2,3
50	25	3	3	2,26
50	25	5	5	3,6
60	30	4	4	3,58
60	30	5	5	4,4
60	30	6	6	5,18
80	40	4	4	4,86
80	40	5	5	6
80	40	6	6	7,1
80	45	6	6	7,58
80	50	5	5	6,8
100	50	4	4	6,14
100	50	5	5	7,6
100	50	6	6	9,02
100	50	10	10	14,4
100	60	7	7	11,54

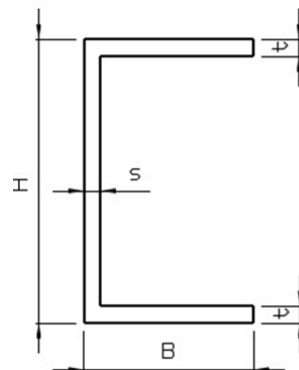

Dimensional Tolerances

Tolleranze dimensionali

EN 10279

Available materials

Qualità disponibili


AISI 304/W.1.4301

AISI 304L/W.1.4307

AISI 316/W.1.4401

AISI 316L/W.1.4404

AISI 316Ti/W.1.4571

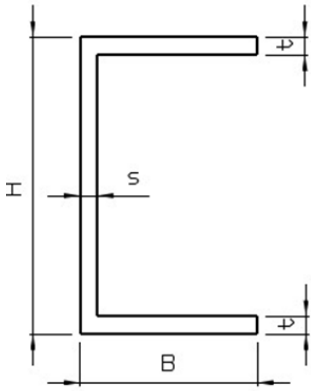

Dimensional Tolerances

Tolleranze dimensionali

EN 10279

Available materials

Qualità disponibili

AISI 304/W.1.4301

AISI 304L/W.1.4307

AISI 316/W.1.4401

AISI 316L/W.1.4404

AISI 316Ti/W.1.4571

H	B	s	t	kg/m
100	60	10	10	16
120	55	9	9	15,26
120	60	6	6	10,94
120	60	10	10	17,6
130	65	6	6	11,9
130	65	9	9	17,42
140	70	7	7	14,9
150	50	9	9	16,7
150	75	6	6	13,82
150	75	9	9	20,3
160	80	6	6	14,78
160	80	8	8	19,46
180	90	8	8	22,02
200	90	8	8	23,3
200	100	6	6	18,62
200	100	8	8	24,58
200	100	10	10	30,4
230	90	7,5	14	32,28
300	150	12	12	55,3