


UNP Channels

Hot rolled - Laminato a caldo

H	B	s	t	kg/m
20	10	3	3,5	0,87
30	15	4	4,5	1,75
30	33	5	7	4,34
40	20	3	3,5	1,91
40	20	4	4,5	2,43
40	35	5	7	4,96
50	25	5	6	3,92
50	38	5	7	5,7
60	30	6	6	5,18
65	42	5,5	7,5	7,24
80	45	6	8	8,83
100	50	6	8,5	10,78
120	55	7	9	13,63
140	60	7	10	16,32
160	65	7,5	10,5	19,26

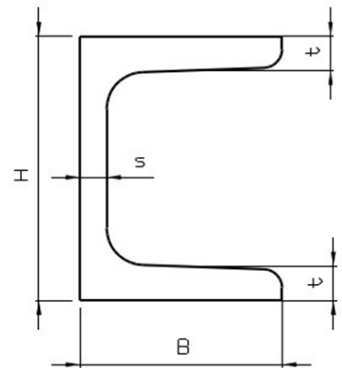

Dimensional Tolerances

Tolleranze dimensionali

EN 10279

Available materials

Qualità disponibili

AISI 304/W.1.4301

AISI 304L/W.1.4307

AISI 316/W.1.4401

AISI 316L/W.1.4404

AISI 316Ti/W.1.4571