


# UNP Channels

## Laser fused - Saldato Laser

H	B	s	t	kg/m
30	15	4	4,5	1,75
40	20	3	3,5	1,92
40	20	4	4,5	2,44
40	35	5	7	4,96
50	25	5	6	3,92
50	38	5	7	5,7
60	30	6	6	5,19
65	42	5,5	7,5	7,24
80	45	6	8	8,85
100	50	6	8,5	10,8
120	55	7	9	13,63
140	60	7	10	16,32
160	65	7,5	10,5	19,26
180	70	8	11	22,43
200	75	8,5	11,5	25,84
220	80	9	12,5	30,04
240	85	9,5	13	33,94
260	90	10	14	38,72
280	95	10	15	42,8
300	100	10	16	47,04
320	100	14	17,5	59,92
350	100	14	16	61,22
380	102	13,5	16	63,7
400	110	14	18	72,45

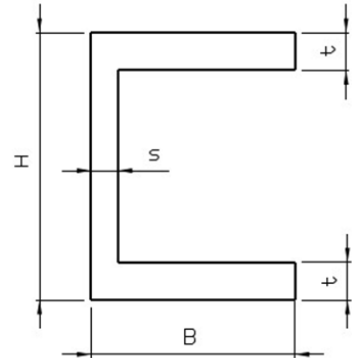

### Dimensional Tolerances

Tolleranze dimensionali

EN 10279

### Note

Note

Non-tapered channel

R $\leq$ 2

### Available materials

Qualità disponibili

AISI 304/W.1.4301

AISI 304L/W.1.4307

AISI 316/W.1.4401

AISI 316L/W.1.4404

AISI 316Ti/W.1.4571